

FZ0 T

POMPE AD INGRANAGGI
GEAR PUMPS




TANDEM 21 UNI 222

CODICE DI ORDINAZIONE / ORDERING CODE

200 FZ0 XXX X T

21 UNI 222
ROTAZIONE / ROTATION
D = DESTRO / CLOCKWISE
S = SINISTRO / ANTICLOCKWISE
CILINDRATA / DISPLACEMENT
TIPO / TYPE
POMPA AD INGRANAGGI / GEAR PUMP

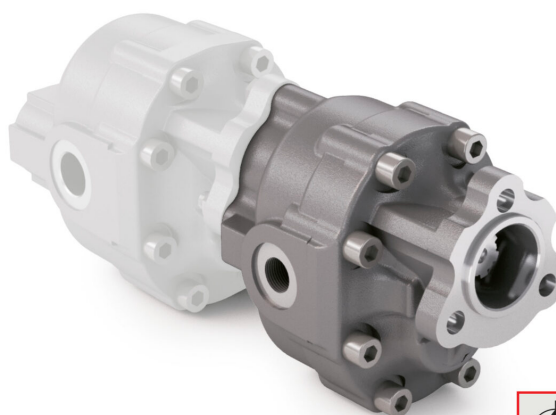


FZ0 22 T	FZ0 36 T	FZ0 57 T	FZ0 90 T
FZ0 27 T	FZ0 43 T	FZ0 65 T	FZ0 110 T

SPECIFICATIONS AND TECHNICAL DATA

TYPE	CODE	DISPLACEMENT cm ³	A mm	B mm	C INLET	D OUTLET	WEIGHT kg
FZ0 36 T	200FZ0036DT 200FZ0036ST	36	99,5	160	3/4	1/2	9,3
FZ0 43 T	200FZ0043DT 200FZ0043ST	43	104,5	165	1	3/4	10,5
FZ0 57 T	200FZ0057DT 200FZ0057ST	57	111,5	175	1	3/4	11,3
FZ0 65 T	200FZ0065DT 200FZ0065ST	65	116,5	180	1	3/4	11,8
FZ0 90 T	200FZ0090DT 200FZ0090ST	84	126	195	1-1/4	1	12,8

FZ0 110 T	200FZ0110DT 200FZ0110ST	105	138	207	1-1/4	1	15,3
FZ0 22 T	200FZ0022DT 200FZ0022ST	22	99,5	149,5	3/4	1/2	9,1
FZ0 27 T	200FZ0027DT 200FZ0027ST	27	105	153	3/4	1/2	9,2

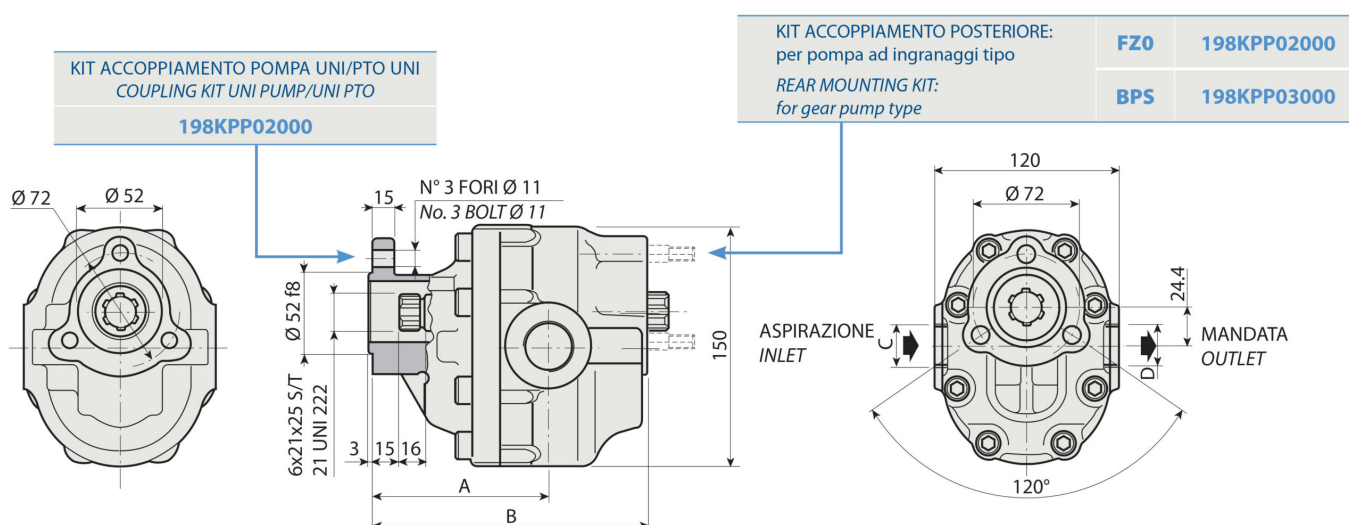

TYPE	CODE	DISPLACEMENT cm ³	MAX CONTINUOUS OPERATING PRESSURE bar	MAX INTERMITT. OPERATING PRESSURE (MAX 30S) bar	MAX PEAK PRESSURE (P<= 0.1S) bar	MAX INTERMITTENT SPEED (P<=20 BAR) n/min r.p.m.	MAX CONTINUOUS SPEED (<=P1) n/min r.p.m.	MIN INTERMITTENT SPEED (<=P2X0.5) (MAX 30S) n/min r.p.m.
FZ0 36 T	200FZ0036DT 200FZ0036ST	36	300	325	450	3500	2200	350
FZ0 43 T	200FZ0043DT 200FZ0043ST	43	280	305	400	3500	2200	350
FZ0 57 T	200FZ0057DT 200FZ0057ST	57	240	265	380	3500	2000	300
FZ0 65 T	200FZ0065DT 200FZ0065ST	65	220	240	350	3500	1800	300
FZ0 90 T	200FZ0090DT 200FZ0090ST	84	210	230	300	3500	1500	300
FZ0 110 T	200FZ0110DT 200FZ0110ST	105	180	200	250	3000	1500	300
FZ0 22 T	200FZ0022DT 200FZ0022ST	22	305	330	450	4000	2500	450
FZ0 27 T	200FZ0027DT 200FZ0027ST	27	300	325	450	3500	2200	350

